



LIPPMANN GLOBAL

# LI-40/40R IMPACT CRUSHER



# BEYOND YOUR EXPECTATIONS

Lippmann has a rich 100 year history of designing and delivering heavy duty crushing and screening solutions globally.

Lippmann Global combines the reliability and durability of its crushers with track technology to create the most robust and mobile products on the market.

We are committed to your success today and in the future by representing a higher standard of premium quality.

The Lippmann Global experience extends beyond well-crafted engineering to include benefits designed around your real needs and wants, respecting how you do business.

We go beyond traditional expectations.

## LIPPMANN GLOBAL FEATURES

---

4-year / 6000h warranty

Base unit

Belt scraper

Double deck independent pre-screen

Hopper extension

Jib hoist

Over band Magnet - twin pole

Safety beacons

Tough-flex main conveyor belt


Underpan not included in LG standard

Wear pleate in hopper

Working lights

LI-40/40R

# LIPPMANN GLOBAL IMPACT CRUSHERS

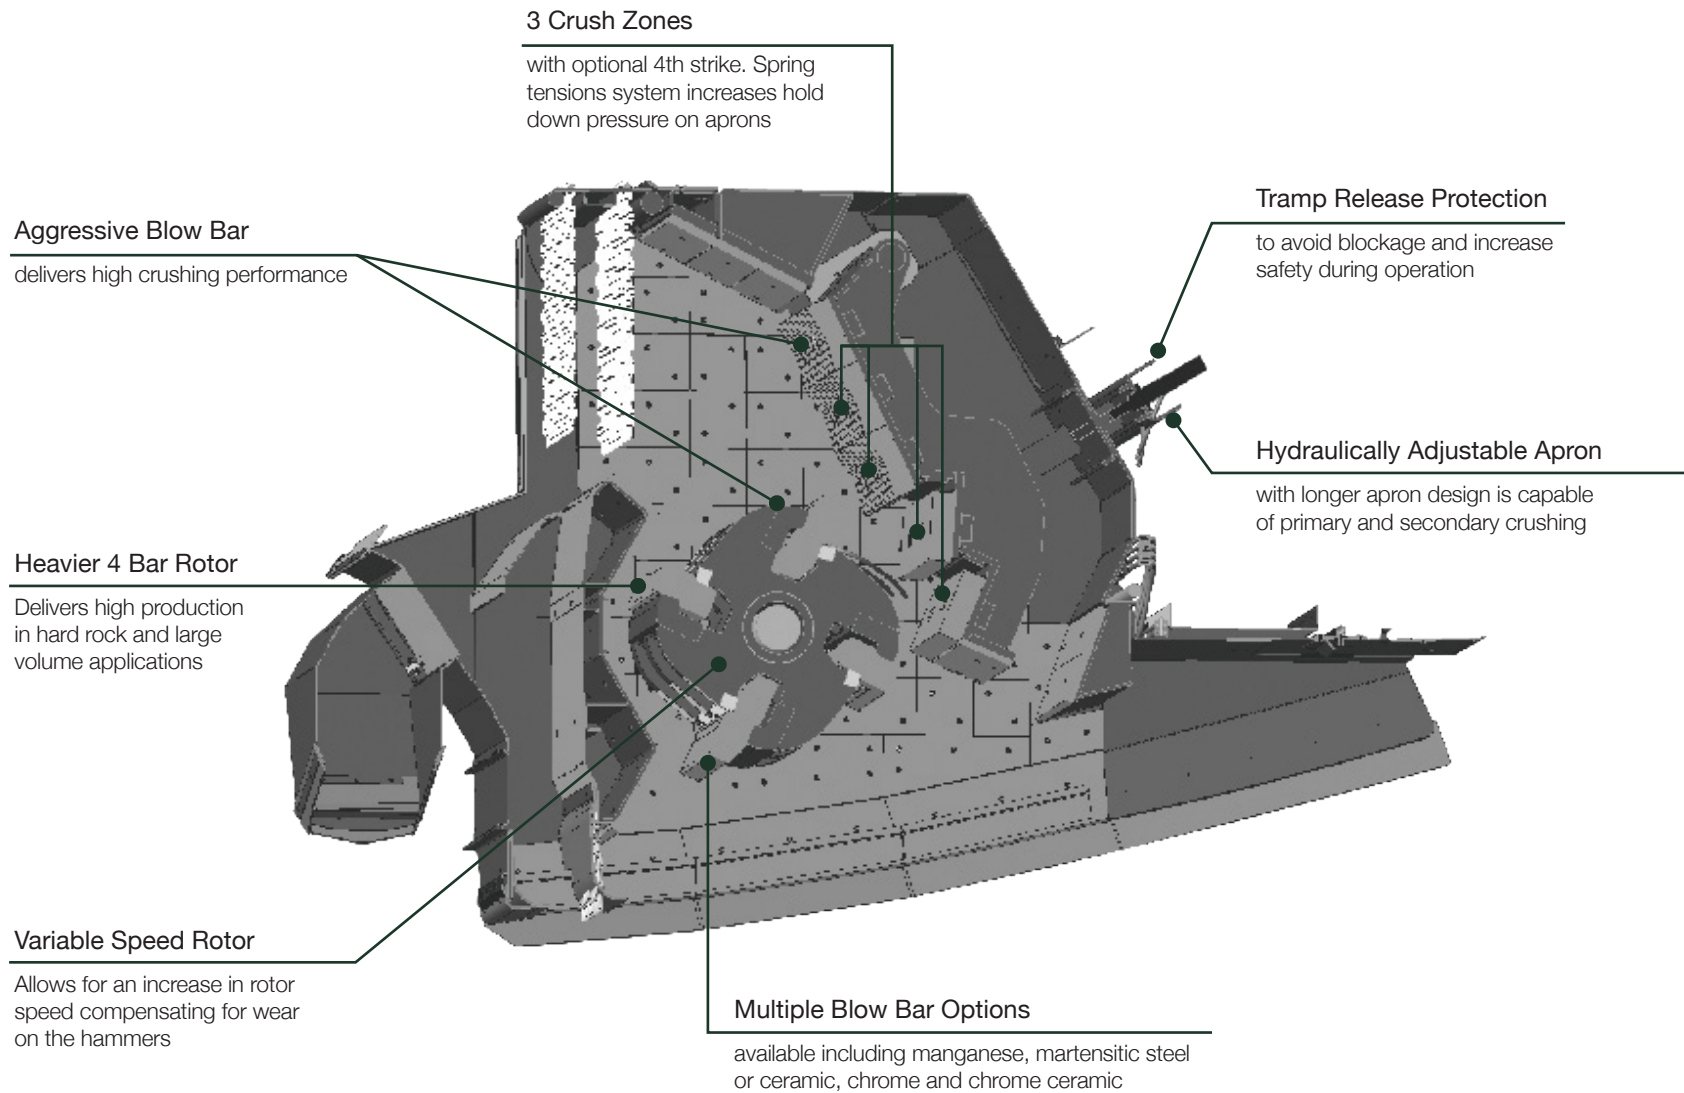

# LI-40 TECHNICAL SPECIFICATIONS

## CRUSHING CHAMBER

Impact Rotor	1050mm x 1125mm
Feed Opening	1149mm x 708mm
Crusher Drive	Direct Drive
Feed Size	600 x 500 x 500 lump
CSS Adjustment	Hydraulic
Speed Sensor	YES

## HOPPER

Hopper Length	4280mm
Hopper Width	2180mm
Hopper Volume	6m <sup>3</sup>
Hopper Material	8mm sides + 10mm liners

## FEEDER

Feeder Width	1064mm
Feeder Belt Width	2460mm
Adjustable Speed	YES
Drive	Hydraulic

## CONVEYOR

Stockpile Height	4142mm
Belt Width	1200mm
Angle Adjustable	YES
Quick Release	YES


## ENGINE

Engine Power	261kW - 268kW
Fuel Tank Capacity	595 L
Hydraulic Tank Capacity	650 L

## DIMENSIONS

Transport Length	15.668m
Transport Width	2.78m
Transport Height	3.40m

<b>TOTAL WEIGHT</b>	<b>42,000 KG (EST.)</b>
---------------------	-------------------------

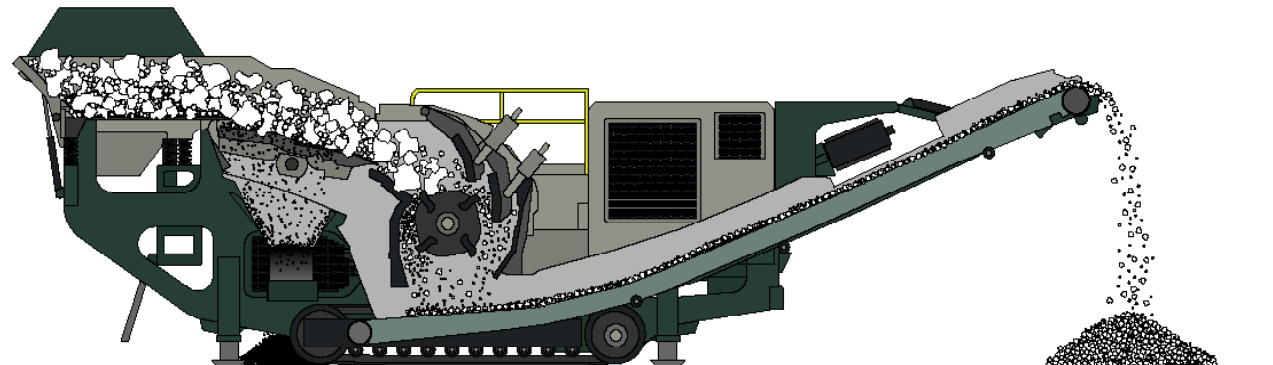

# LI-40R TECHNICAL SPECIFICATIONS

## CRUSHING CHAMBER

Impact Rotor	1050mm x 1125mm
Feed Opening	1149mm x 708mm
Crusher Drive	Direct Drive
Feed Size	600 x 500 x 500 lump
CSS Adjustment	Hydraulic
Speed Sensor	YES

## HOPPER

Hopper Length	4280mm
Hopper Width	2180mm
Hopper Volume	6m <sup>3</sup>
Hopper Material	8mm sides + 10mm liners

## FEEDER

Feeder Width	1064mm
Feeder Belt Width	2460mm
Adjustable Speed	YES
Drive	Hydraulic

## CONVEYOR

Stockpile Height	3529mm
Belt Width	1200mm
Angle Adjustable	YES
Quick Release	YES


## ENGINE

Engine Power	261kW - 268kW
Fuel Tank Capacity	595 L
Hydraulic Tank Capacity	650 L

## DIMENSIONS

Transport Length	16.33m
Transport Width	3.262m
Transport Height	3.40m

<b>TOTAL WEIGHT</b>	<b>53,408 KG (EST.)</b>
---------------------	-------------------------

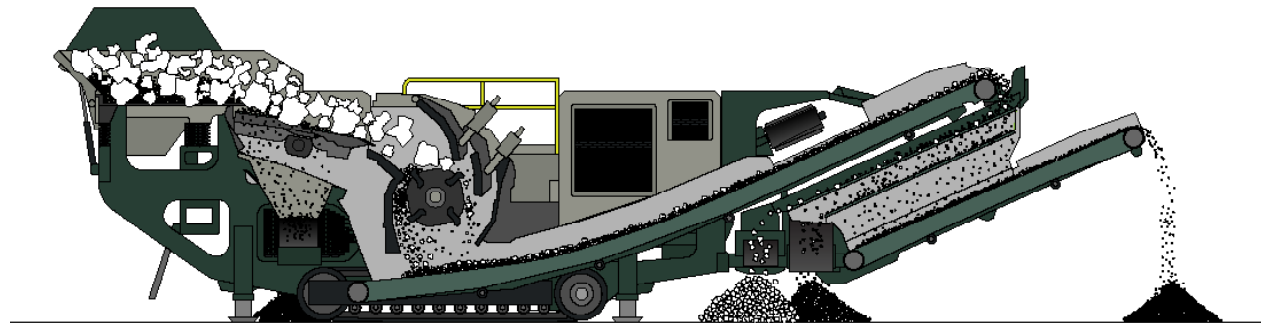



[www.lippmannglobal.com](http://www.lippmannglobal.com)

[sales@lippmannglobal.com](mailto:sales@lippmannglobal.com)

Lippmann Global reserves the right to make changes to the information and design of the machines in this brochure without reservation or notification to users. Lippmann Global assumes no liability resulting from errors or omissions in this document.

© Lippmann Global 2021.