



LIPPMANN GLOBAL

LR-30 SCREENER



BEYOND YOUR EXPECTATIONS

Lippmann has a rich 100 year history of designing and delivering heavy duty crushing and screening solutions globally.

Lippmann Global combines the reliability and durability of its crushers with track technology to create the most robust and mobile products on the market.

We are committed to your success today and in the future by representing a higher standard of premium quality.

The Lippmann Global experience extends beyond well-crafted engineering to include benefits designed around your real needs and wants, respecting how you do business.

We go beyond traditional expectations.

LIPPMANN GLOBAL FEATURES

4-year / 6000h warranty

Base unit

Belt scraper

Extended 14ft wide hopper wings

Remote variable speed and start stop package
on feeder belt

Safety beacons

Split top deck mesh frame and finger section

Tough-flex belt on feeder

Wear plate in hopper

Working lights

LR-30

LIPPMANN GLOBAL SCREENER

Adjustable screenbox dynamics allow shift from amplitude, high frequency profile for very fine screen applications.

Hydraulic screenbox linkage system and supports, allows greater access for screen change and access.

Easily accessed take-ups for ease of screen change


Quick release pin and wedge system

Heavy screenbox vibrating at 950 RPM with 10mm throw - resists plugging and blinding, increasing production rates

Direct drive motor requiring less maintenance

Many deck options and combinations due to 5 deck configuration

Hydraulic screenbox support allows for 5 angle settings between 13 degrees and 17 degrees enabling optimum screen coverage

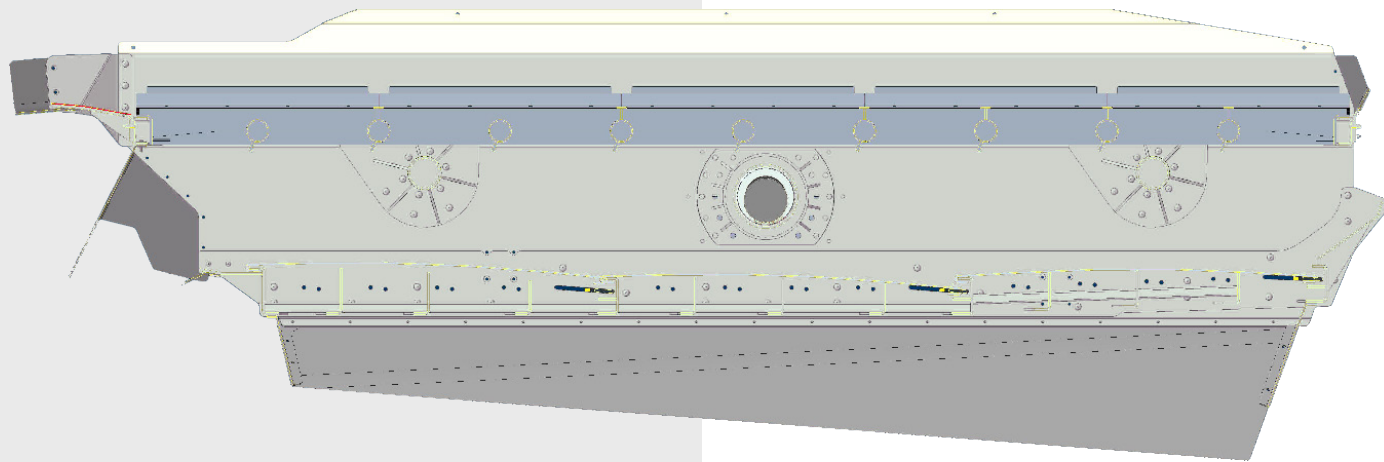

LR-30 TECHNICAL SPECIFICATIONS

SCREENBOX

Dimensions Top Deck	16' x 5'
Dimensions Bottom Deck	15' x 5'
Screens Top Deck	5' x 4'
Screens Bottom Deck	5' x 5'
Screen Angle	16 - 20 deg
Speed Adjustable	YES
Screen Stroke Adjustable	6 - 10mm

HOPPER

Hopper Volume	8m ³
---------------	-----------------

BELT FEED CONVEYOR

Belt Width	1400mm
Adjustable Speed	YES

COLLECTION CONVEYOR

Belt Width	1200mm
Angle Adjustable	YES

CONVEYOR

Stockpile Height	2770 - 3750mm
Belt Width	1400mm
Angle Adjustable	YES
Angle	12 - 24 deg


ENGINE

Engine Power	97kW
Fuel Tank Capacity	399 L
Hydraulic Tank Capacity	630 L

DIMENSIONS

Transport Length	15.30m
Transport Width	2.9m
Transport Height	3.4m
Operating Length	15.21m
Operating Width	13.45m

TOTAL WEIGHT	29,860 KG (EST.)
---------------------	-------------------------

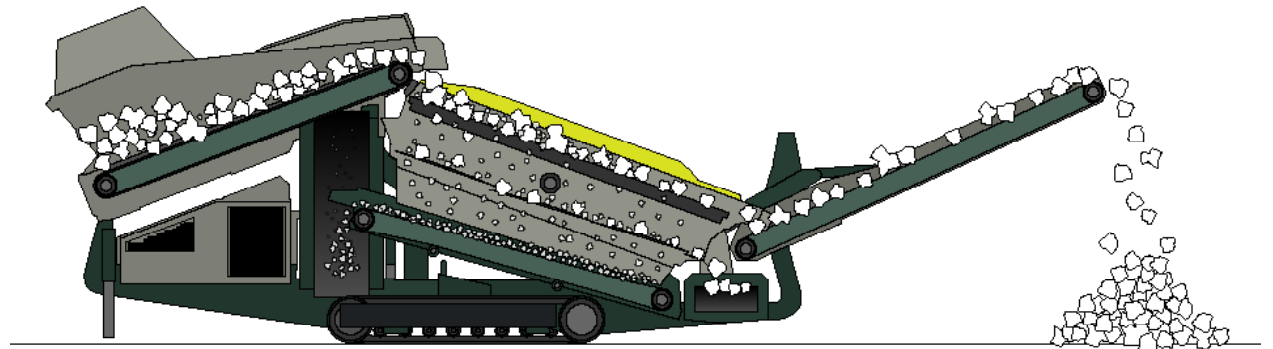



www.lippmannglobal.com

sales@lippmannglobal.com

Lippmann Global reserves the right to make changes to the information and design of the machines in this brochure without reservation or notification to users. Lippmann Global assumes no liability resulting from errors or omissions in this document.

© Lippmann Global 2021.