



LIPPMANN GLOBAL

# LR-40 SCREENER



# BEYOND YOUR EXPECTATIONS

Lippmann has a rich 100 year history of designing and delivering heavy duty crushing and screening solutions globally.

Lippmann Global combines the reliability and durability of its crushers with track technology to create the most robust and mobile products on the market.

We are committed to your success today and in the future by representing a higher standard of premium quality.

The Lippmann Global experience extends beyond well-crafted engineering to include benefits designed around your real needs and wants, respecting how you do business.

We go beyond traditional expectations.

## LIPPMANN GLOBAL FEATURES

---

4-year / 6000h warranty

Base unit

Belt scraper

Extended 14ft wide hopper wings

Remote variable speed and start stop package  
on feeder belt

Safety beacons

Split top deck mesh frame and finger section

Tough-flex belt on feeder

Wear plate in hopper

Working lights

LR-40

# LIPPMANN GLOBAL SCREENER

Adjustable screenbox dynamics allow shift from amplitude, high frequency profile for very fine screen applications.

---

Hydraulic screenbox linkage system and supports, allows greater access for screen change and access.

---

Easily accessed take-ups for ease of screen change

---

Quick release pin and wedge system

---

Heavy screenbox vibrating at 950 RPM with 10mm throw - resists plugging and blinding, increasing production rates

---

Direct drive motor requiring less maintenance


---

Many deck options and combinations due to 5 deck configuration

---

Hydraulic screenbox support allows for 5 angle settings between 13 degrees and 17 degrees enabling optimum screen coverage

---

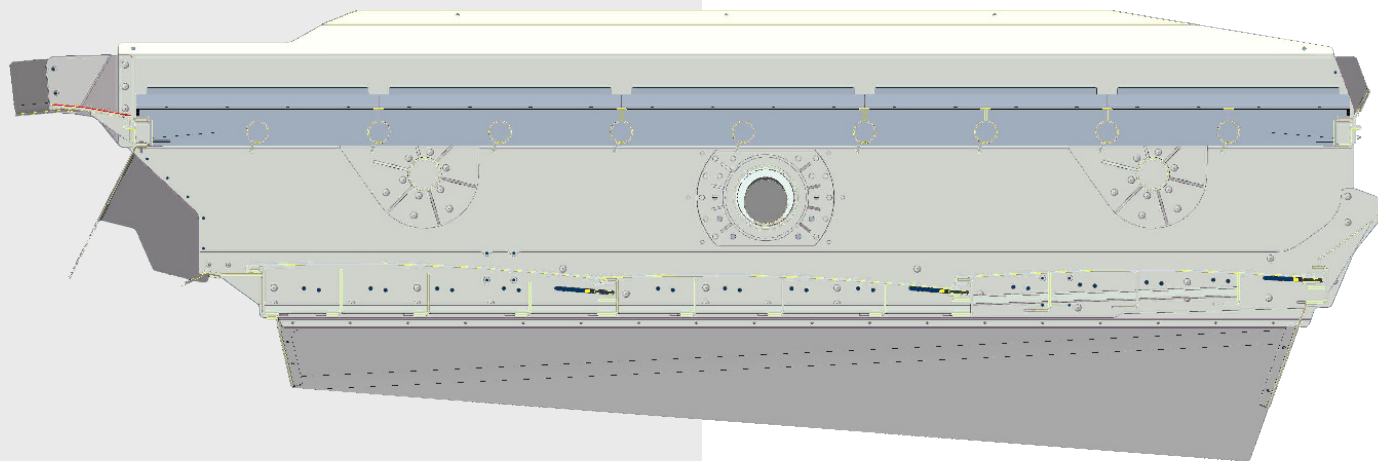

# LR-40 TECHNICAL SPECIFICATIONS

## SCREENBOX

Dimensions Top Deck	20' x 6'
Dimensions Bottom Deck	18' x 6'
Screens Top Deck	6' x 4'
Screens Bottom Deck	6' x 6'
Screen Angle	13 - 17 deg
Speed Adjustable	YES
Screen Stroke Adjustable	8 - 10mm

## HOPPER

Hopper Volume	11.5m <sup>3</sup>
---------------	--------------------

## BELT FEED CONVEYOR

Belt Width	1500mm
Adjustable Speed	YES

## COLLECTION CONVEYOR

Belt Width	1400mm
Angle Adjustable	YES

## CONVEYOR

Stockpile Height	3.83m
Belt Width	1600mm
Angle Adjustable	YES
Angle	12 - 24 deg


## ENGINE

Engine Power	168kW
Fuel Tank Capacity	485 L
Hydraulic Tank Capacity	800 L

## DIMENSIONS

Transport Length	16.97m
Transport Width	3.0m
Transport Height	3.5m
Operating Length	16.5m
Operating Width	14m

<b>TOTAL WEIGHT</b>	<b>37,200 KG (EST.)</b>
---------------------	-------------------------

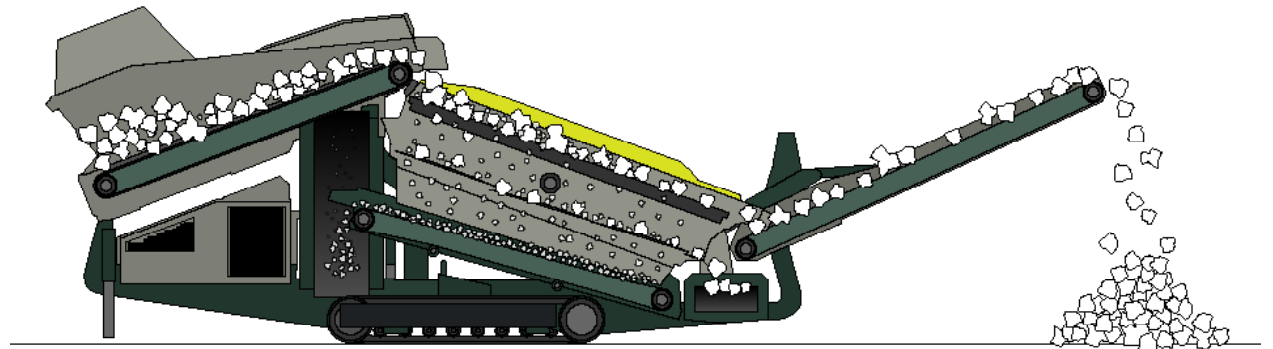



[www.lippmannglobal.com](http://www.lippmannglobal.com)

[sales@lippmannglobal.com](mailto:sales@lippmannglobal.com)

Lippmann Global reserves the right to make changes to the information and design of the machines in this brochure without reservation or notification to users. Lippmann Global assumes no liability resulting from errors or omissions in this document.

© Lippmann Global 2021.