



1200J

JAW CRUSHER

MAKING PREMIUM OUR STANDARD

Lippmann has a rich 100 year history of designing and delivering heavy duty crushing and screening solutions globally.

Lippmann combines the reliability and durability of its crushers with track technology to create the most robust and mobile products on the market.

We are committed to your success today and in the future by representing a higher standard of premium quality.

The Lippmann experience extends beyond well-crafted engineering to include benefits designed around your real needs and wants, respecting how you do business.

We go beyond traditional expectations.

FEATURES

Wear Plate in Hopper
Water Pump and Dust Suppression System
Intergrated Hydraulic Folding Hopper
External Belt Alignment Points
High Level Side Walkways

PREMIUMS

Side Discharge Belt
Working Lights
50mm Corrugated 22% manganese Jaw Plates
Tough-Flex Feeder Belt
Safety Beacons
Martin Belt Scraper
Engine Safety Shutdown Systems
4 Year / 6000 Hour Warranty

OPTIONS

Hopper Extensions
50mm or 70mm Aperture Bofor
30mm/50mm Corrugated Dies
Square Tooth/Multitooth Dies
Seperarate Pre-Screen and Pan Feeder

1200J

LIPPMANN JAW CRUSHERS

Lippmann Global has taken the history of building the toughest jaw crushers on the market and applied it to the track mounted jaw crushers. These plants combine the high production that is expected from Lippmann with the high mobility of a track-mounted machine.

SCALPED

Crusher throughput capacity, scalped feed material*

CSS	Capacity
100 mm	270-369
125 mm	325-446
150 mm	380-523
175 mm	435-600
200 mm	490-677
225 mm	545-754
250 mm	600-831


*May vary based on material

NON-SCALPED

Crusher throughput capacity, scalped feed material*

CSS	Capacity
100 mm	316-428
125 mm	407-551
150 mm	503-681
175 mm	605-819
200 mm	711-963
225 mm	822-1,112
250 mm	937-1,267

*May vary based on material

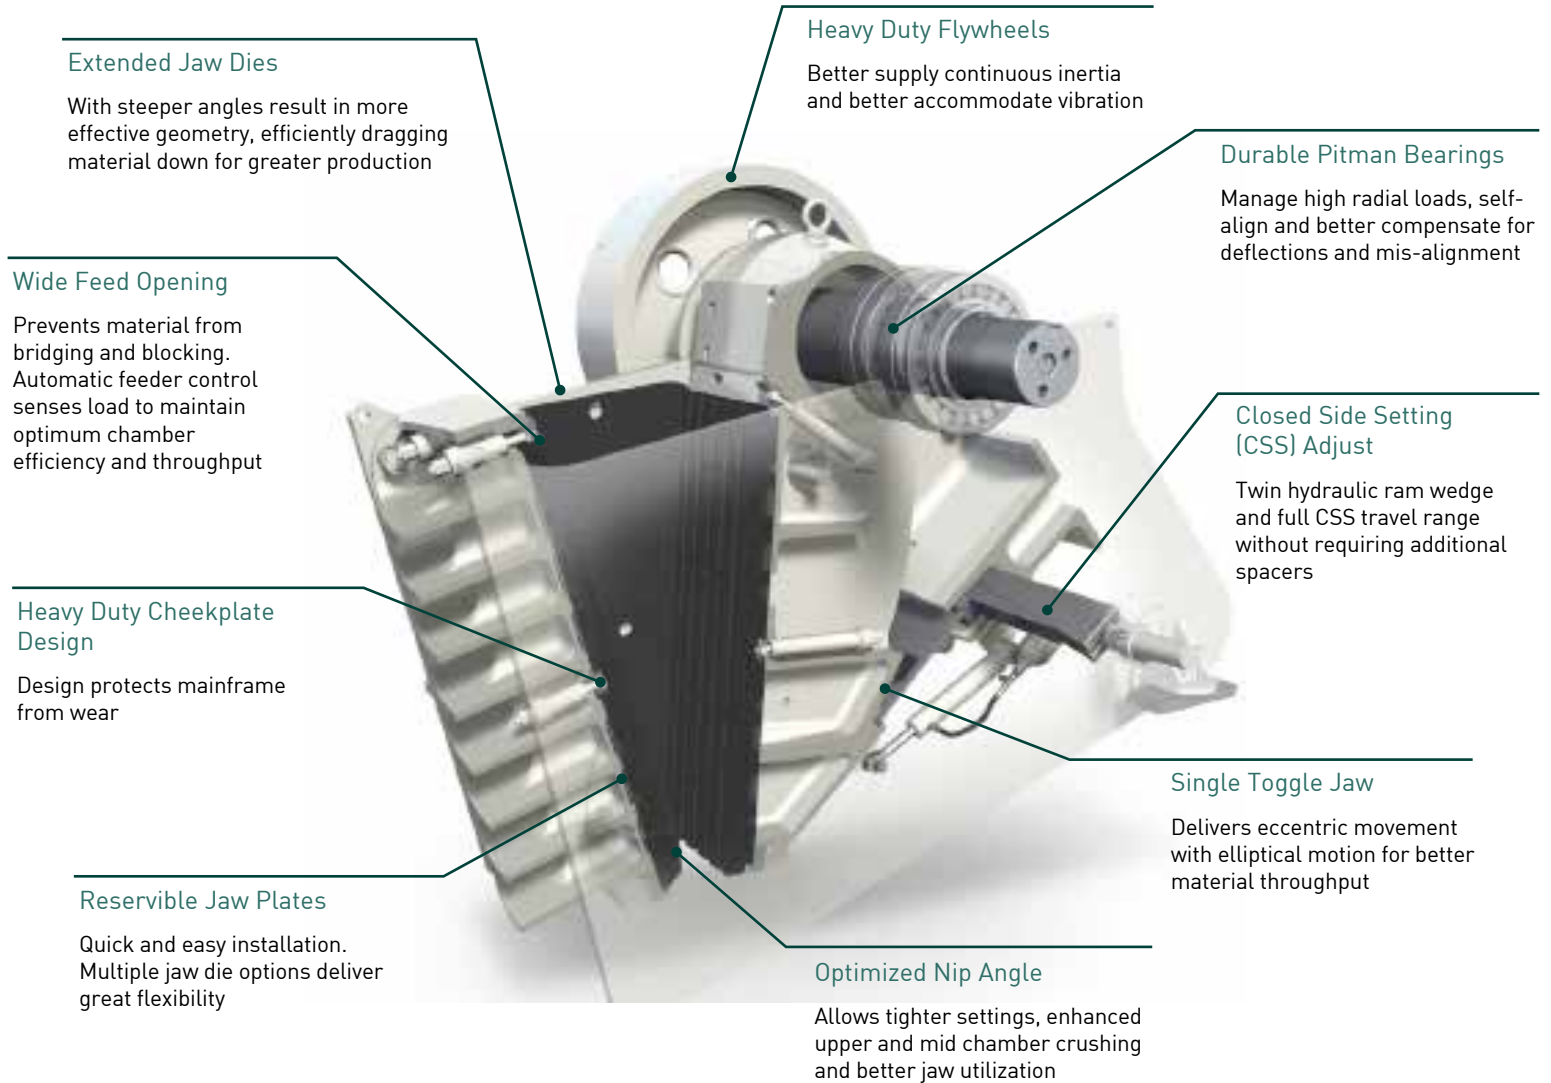

1200J

TECHNICAL SPECIFICATIONS

JAW

Feed Opening	1270mm
Crusher Drive	Hydraulic - V-Belt
Min. Opening	51mm
Max. Opening	175mm
CSS Adjustment	Hydraulic
Level Sensor	Ultrasonic
Crusher Speed	280 rpm

HOPPER

Hopper Length	5374mm
Hopper Width	3732mm
Hopper Volume	6.3m ³

FEEDER

Feeder Width	1164mm
Feeder Belt Width	4450mm
Adjustable Speed	YES
Drive	Hydraulic Direct Drive

CONVEYOR

Stockpile Height	4250mm
Belt Width	1200mm
Angle Adjustable	YES
Quick Release	YES

ENGINE

Engine	CATC9/CAT C9.3
Engine Power	261 kW/350 Hp
Fuel Tank Capacity	800 L
Hydraulic Tank Capacity	1800 L

DIMENSIONS

Transport Length	14.908m
Transport Width	3.0m
Transport Height	3.472m
Operating Length	16.442m

TOTAL WEIGHT

51,000 KG (EST.)





www.lippmannglobal.com | sales@lippmannglobal.com

Lippmann Global reserves the right to make changes to the information and design of the machines in this brochure without reservation or notification to users. Lippmann Global assumes no liability resulting from errors or omissions in this document.

© Lippmann 2021.