



520-2S

SCREENER

MAKING PREMIUM OUR STANDARD

Lippmann has a rich 100 year history of designing and delivering heavy duty crushing and screening solutions globally.

Lippmann combines the reliability and durability of its crushers with track technology to create the most robust and mobile products on the market.

We are committed to your success today and in the future by representing a higher standard of premium quality.

The Lippmann experience extends beyond well-crafted engineering to include benefits designed around your real needs and wants, respecting how you do business.

We go beyond traditional expectations.

FEATURES

Wear Plate in Hopper
Intergrated Hydraulic Folding Stockpiling
Conveyors
External Belt Alignment Points

PREMIUMS

Wear Plate in Hopper & Chutes
Auxiliary Circuit
Remote Variable Speed & Start/Stop Kit
Rinser Ready
Working Lights
Tough-Flex Belt on Feeder
Martin Belt Scraper
Safety Beacons
Engine Safety Shutdown Systems
4 Year / 6000 Hour Warranty

OPTIONS

Single or Double Deck Live Head
Single Shaft Shredder
Radio Remote Control
Crusher Chute (15' Hopper only)

520-2S

LIPPMANN SCREENERS

Heavy duty screenbox

Hydraulic screen linkage system allowing greater access for screen change

Greater screening area coverage with optimized spreader plate


Direct Drive motor for the screenbox requires less maintenance

Quick release pin and wedge system allows fast screen change


No tapers at end of screenbox with sides that are parallel from start to finish to reduce bottlenecks

Wider chutes through machines manage material more effectively, minimizing material spillage and blockages

Top deck screen frame supports screenbox and reduces stress

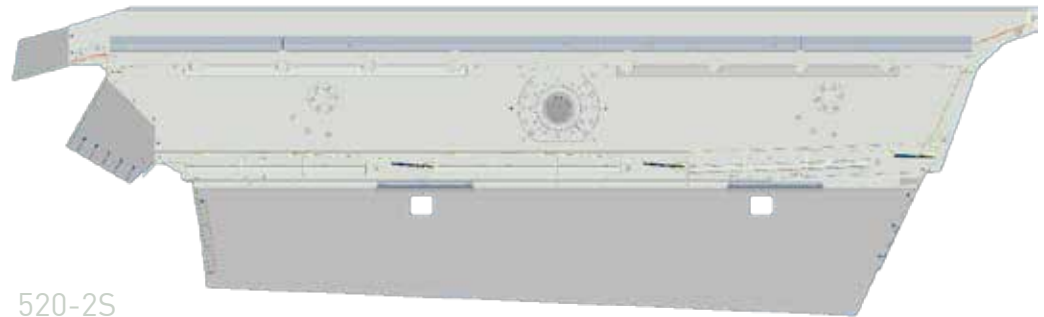

520-2S

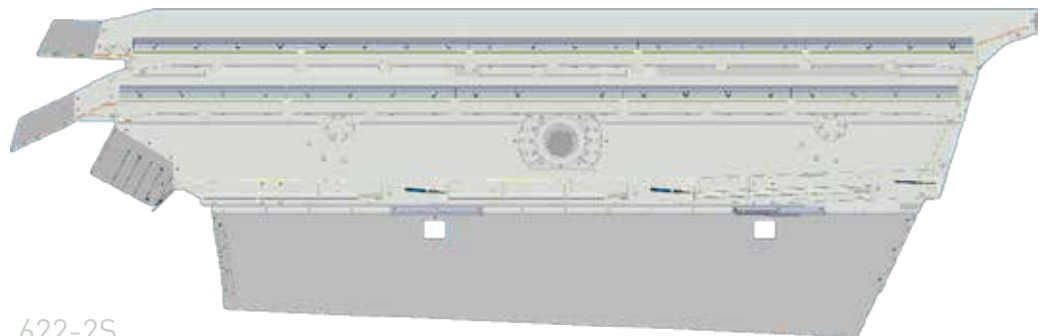

622-2S

520-2S

TECHNICAL SPECIFICATIONS

SCREENBOX

Dimensions Top Deck	20' x 5'
Dimensions Middle Deck	20' x 5'
Dimensions Bottom Deck	18' x 5'
Screens Top Deck	5' x 4'
Screens Middle Deck	5' x 4'
Screens Bottom Deck	5' x 6'
Screen Angle	20 - 30 deg
Speed Adjustable	YES
Screen Stroke Adjustable	6 - 10mm

HOPPER

Hopper Length	
Hopper Width	
Hopper Volume	10.01m ³

BELT FEED CONVEYOR

Belt Width	1200mm
Adjustable Speed	YES

COLLECTION CONVEYOR

Belt Width	1050mm
Angle Adjustable	OPTION

CONVEYOR

Stockpile Height	4638 - 4905mm
Belt Width	1200mm

ENGINE

Engine	CAT C4.4
Engine Power	127Hp
Fuel Tank Capacity	399 L
Hydraulic Tank Capacity	630 L

DIMENSIONS

Transport Length	17.54m (12') / 18.45m (15')
Transport Width	3.06m / 3.22m
Transport Height	3.45m (Tracked) / 3.73m (Wheeled)

TOTAL WEIGHT	36,500 KG (EST.)
---------------------	-------------------------





www.lippmannglobal.com | sales@lippmannglobal.com

Lippmann Global reserves the right to make changes to the information and design of the machines in this brochure without reservation or notification to users. Lippmann Global assumes no liability resulting from errors or omissions in this document.

© Lippmann 2021.