

622-2S SCREENER

MAKING PREMIUM OUR STANDARD

Lippmann has a rich 100 year history of designing and delivering heavy duty crushing and screening solutions globally.

Lippmann combines the reliability and durability of its crushers with track technology to create the most robust and mobile products on the market.

We are committed to your success today and in the future by representing a higher standard of premium quality.

The Lippmann experience extends beyond well-crafted engineering to include benefits designed around your real needs and wants, respecting how you do business.

We go beyond traditional expectations.

FEATURES

Wear Plate in Hopper
Intergrated Hydraulic Folding Stockpiling Conveyors
External Belt Alignment Points

PREMIUMS

Wear Plate in Hopper & Chutes
Auxiliary Circuit
Remote Variable Speed & Start/Stop Kit
Rinser Ready
Working Lights
Tough-Flex Belt on Feeder
Martin Belt Scraper
Safety Beacons
Engine Safety Shutdown Systems
4 Year / 6000 Hour Warranty

OPTIONS

Single or Double Deck Live Head
Single Shaft Shredder
Radio Remote Control
Crusher Chute (15' Hopper only)

622-2S

LIPPMANN SCREENERS

Heavy duty screenbox

Hydraulic screen linkage system allowing greater access for screen change

Greater screening area coverage with optimized spreader plate


Direct Drive motor for the screenbox requires less maintenance

Quick release pin and wedge system allows fast screen change


No tapers at end of screenbox with sides that are parallel from start to finish to reduce bottlenecks

Wider chutes through machines manage material more effectively, minimizing material spillage and blockages

Top deck screen frame supports screenbox and reduces stress

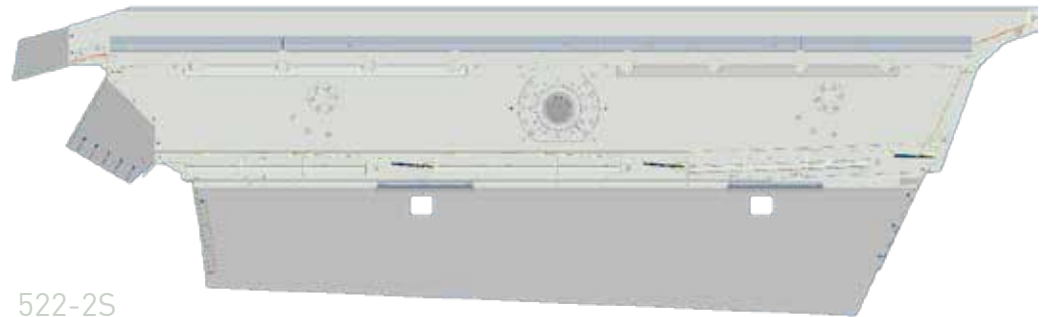

522-2S

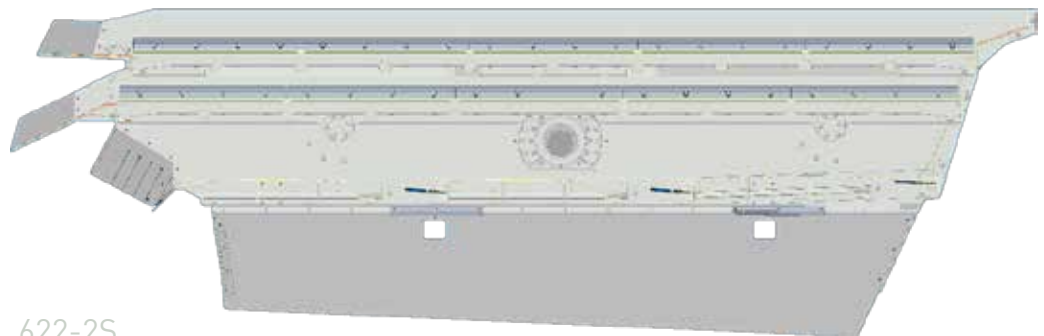

622-2S

622-2S

TECHNICAL SPECIFICATIONS

SCREENBOX

Dimensions Top Deck	22' x 6'
Dimensions Bottom Deck	20' x 6'
Screens Top Deck	6' x 4'
Screens Bottom Deck	6' x 4' (Side Tension) / 6' x 6' 8" (End Tension)
Screen Angle	18 - 25 deg
Speed Adjustable	YES
Screen Stroke Adjustable	6 - 10mm

HOPPER

Hopper Length	
Hopper Width	
Hopper Volume	8m ³ (12') / 10r

BELT FEED CONVEYOR

Belt Width	1200mm
Adjustable Speed	YES

COLLECTION CONVEYOR

Belt Width	1200mm
Angle Adjustable	Option

CONVEYOR

Stockpile Height	4992mm
Belt Width	1200mm

ENGINE

Engine	CAT C7
Engine Power	225Hp
Fuel Tank Capacity	485 L
Hydraulic Tank Capacity	800 L

DIMENSIONS

Transport Length	18.63m (12') / 19.55m (15')
Transport Width	3.3m
Transport Height	3.6m

TOTAL WEIGHT	38,000 KG (EST.)
---------------------	-------------------------





www.lippmannglobal.com | sales@lippmannglobal.com

Lippmann Global reserves the right to make changes to the information and design of the machines in this brochure without reservation or notification to users. Lippmann Global assumes no liability resulting from errors or omissions in this document.

© Lippmann 2021.