



LIPPMANN GLOBAL

LI-50/50R IMPACT CRUSHER



BEYOND YOUR EXPECTATIONS

Lippmann has a rich 100 year history of designing and delivering heavy duty crushing and screening solutions globally.

Lippmann Global combines the reliability and durability of its crushers with track technology to create the most robust and mobile products on the market.

We are committed to your success today and in the future by representing a higher standard of premium quality.

The Lippmann Global experience extends beyond well-crafted engineering to include benefits designed around your real needs and wants, respecting how you do business.

We go beyond traditional expectations.

LIPPMANN GLOBAL FEATURES

4-year / 6000h warranty

Base unit

Belt scraper

Double deck independent pre-screen

Hopper extension

Jib hoist

Over band Magnet - twin pole

Safety beacons


Tough-flex main conveyor belt

Wear pleate in hopper

Working lights

LI-50/50R

LIPPMANN GLOBAL IMPACT CRUSHERS

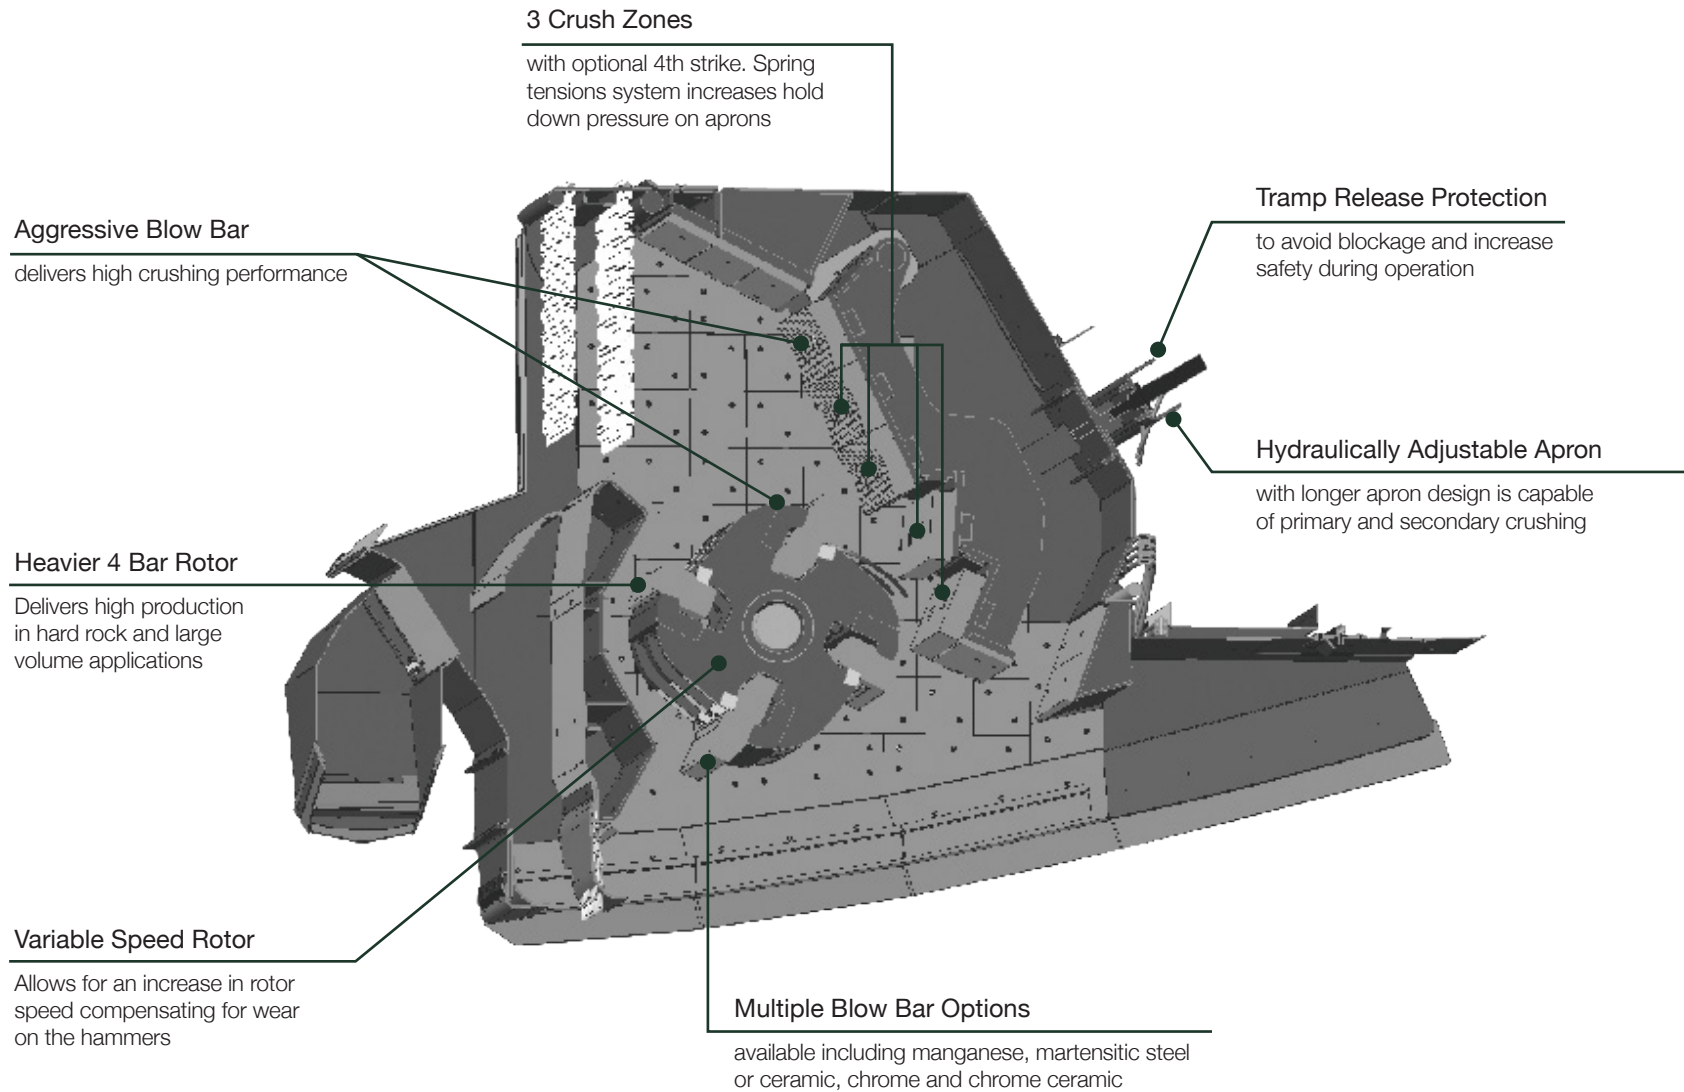

LI-50 TECHNICAL SPECIFICATIONS

CRUSHING CHAMBER

Impact Rotor	1200mm x 1335mm
Feed Opening	1350mm x 950mm
Crusher Drive	Direct Drive
Feed Size	600 x 500 x 500 lump
CSS Adjustment	Hydraulic
Speed Sensor	YES

HOPPER

Hopper Length	4280mm
Hopper Width	2180mm
Hopper Volume	6m ³
Hopper Material	8mm sides + 10mm liners

FEEDER

Feeder Width	1164mm
Feeder Belt Width	2695mm
Adjustable Speed	YES
Drive	Hydraulic

CONVEYOR

Stockpile Height	4188mm
Belt Width	1400mm
Angle Adjustable	OPTION
Quick Release	YES


ENGINE

Engine Power	380kW
Fuel Tank Capacity	864 L
Hydraulic Tank Capacity	783 L

DIMENSIONS

Transport Length	15.857m
Transport Width	3.0m
Transport Height	3.60m

TOTAL WEIGHT	52,900 KG (EST.)
---------------------	-------------------------

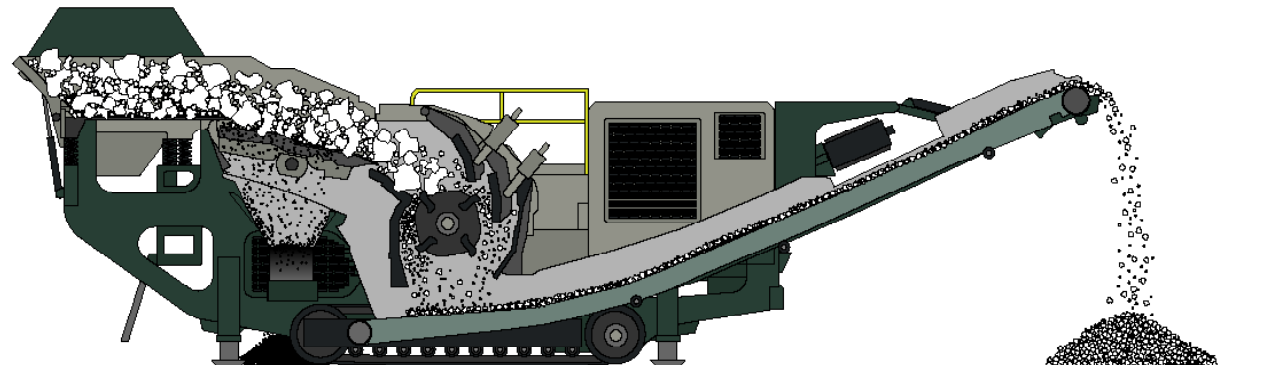

LI-50R TECHNICAL SPECIFICATIONS

CRUSHING CHAMBER

Impact Rotor	1200mm x 1335mm
Feed Opening	1350mm x 950mm
Crusher Drive	Direct Drive
Feed Size	600 x 500 x 500 lump
CSS Adjustment	Hydraulic
Speed Sensor	YES

HOPPER

Hopper Length	4280mm
Hopper Width	2180mm
Hopper Volume	6m ³
Hopper Material	8mm sides + 10mm liners

FEEDER

Feeder Width	1164mm
Feeder Belt Width	2695mm
Adjustable Speed	YES
Drive	Hydraulic

CONVEYOR

Stockpile Height	3743mm
Belt Width	1400mm
Angle Adjustable	OPTION
Quick Release	YES


ENGINE

Engine Power	380kW
Fuel Tank Capacity	864 L
Hydraulic Tank Capacity	783 L

DIMENSIONS

Transport Length	19.081m
Transport Width	3.75m
Transport Height	3.60m

TOTAL WEIGHT	64,990 KG (EST.)
---------------------	-------------------------

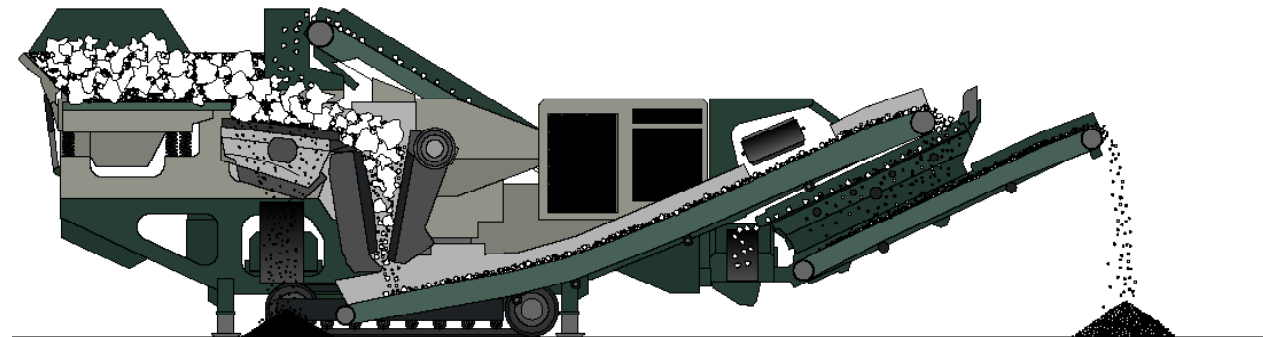



www.lippmannglobal.com

sales@lippmannglobal.com

Lippmann Global reserves the right to make changes to the information and design of the machines in this brochure without reservation or notification to users. Lippmann Global assumes no liability resulting from errors or omissions in this document.

© Lippmann Global 2021.